

PARK COUNTY ROAD & BRIDGE STANDARDS STANDARD DRAWINGS

ISSUED:

REVISED:

DRAWING NO.: 5-2

CLASSIFICATION	ADT	ROW WIDTH	TRAVEL WIDTH	SHOULDER WIDTH	PAVEMENT REQUIRED
PRIMARY	> 700	80	24	6	YES
SECONDARY	100-700	60	24	4	YES
RESIDENTIAL	≥ 99	60	24	2	BY DESIGN
LOCAL ACCESS	< 99	60	24	2	N/A
RECREATIONAL	N/A	40	20	N/A	N/A

NOTES:

ADDITIONAL ROW MAY BE REQUIRED TO PROVIDE A MINIMUM CLEAR DISTANCE OF TWELVE(12) FEET FROM EDGE OF PAVEMENT TO ROW LINE.

PAVEMENT SECTION AS PER APPROVED PAVEMENT DESIGN OR MINIMUM SECTION PER TABLE 5-3

OFFSET CUL-DE-SAC MAY BE CONSTRUCTED OPPOSITE HAND IF DESIRED

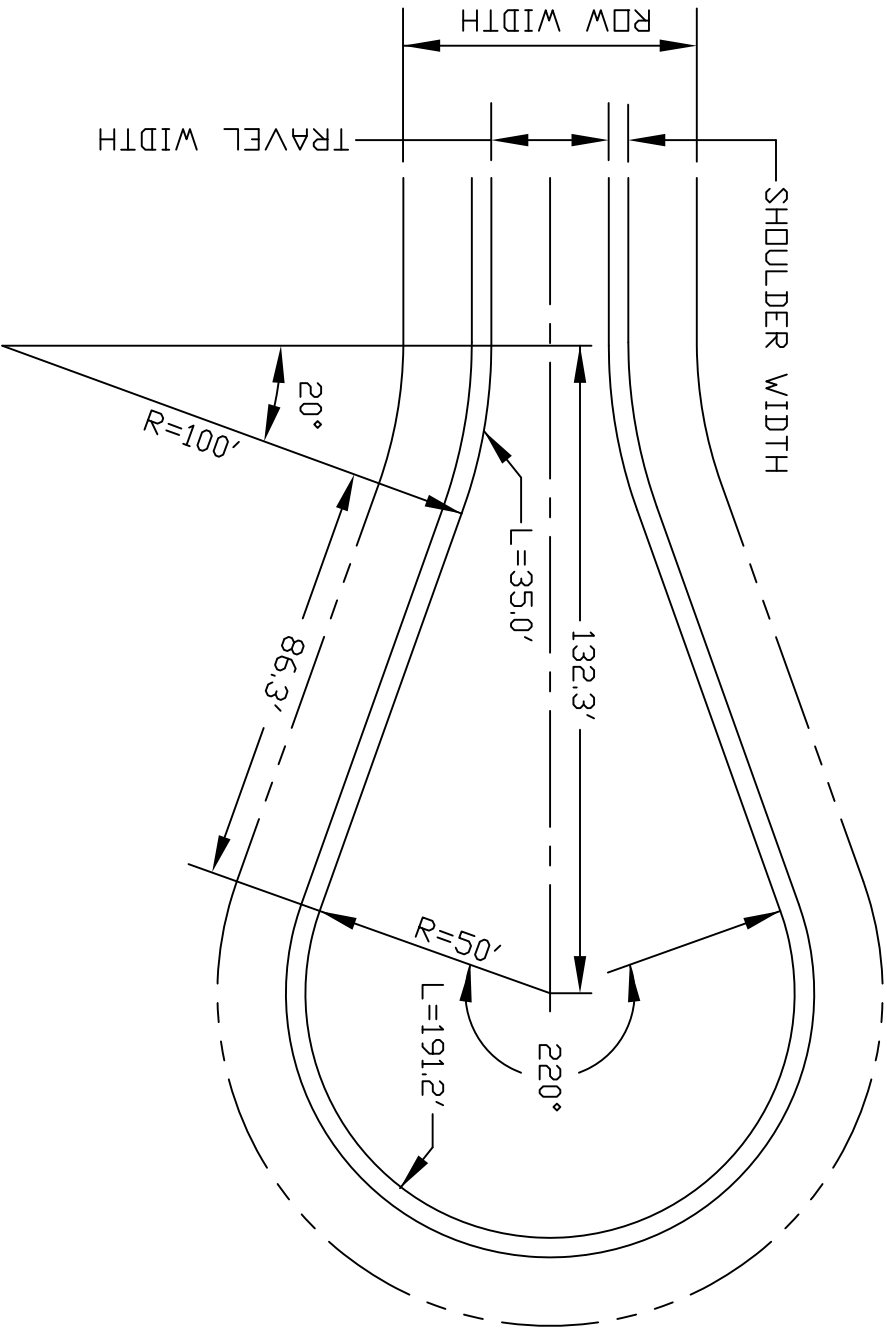


FIGURE 5-2
TYPICAL CUL-DE-SAC